

Justin Inc., 2663 Lee Ave, South El Monte, CA 91733 USA

Call Toll Free: 800.989.4517


Copyright © 2025 Justin, Inc. | p: 626.444.4516 | f: 626.444.9462 | info@justininc.com

UL Recognized/Listed Class 2 Power Supply, 36 Through 288 Watt Models, 12VDC and 24VDC


- BAA – Buy American Act compliant
- Indoor/Outdoor Enclosure, Conduit Ready
- Manual Reset Overload Protection
- Multiple Inputs 120, 240, 277V, 50/60Hz
- Reliable Power Source for LED Lighting Applications
- Magnetic Dimmer Ready, Input Dimmable
- Made in USA
- UL Listed / UL Recognized (File E471431)
- CSA Approved
- Our Class 2 DC magnetic LED drivers are designed exclusively to be connected to and power LEDs providing illumination. Use of other bulbs or fixture types will void any and all warranties.



UL Recognized, Class 2
UL48 / UL1310 Outdoor Rated

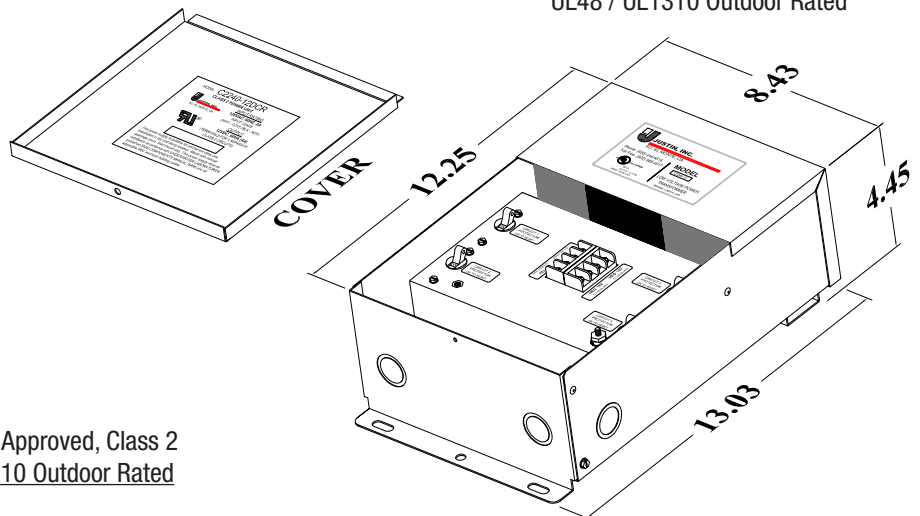

Model: C2240-12DCR, C2240-24DCR

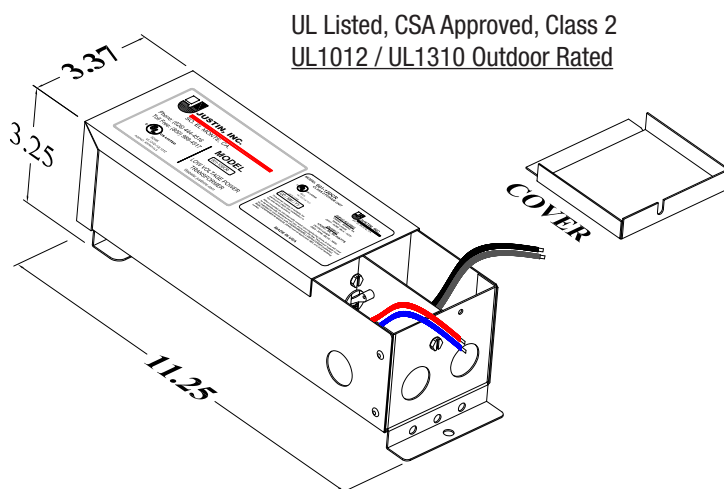

UL Listed, CSA Approved, Class 2
UL1012 / UL1310 Outdoor Rated

Model: 361-12DCR, 481-24DCR,
601-12DCR, 961-24DCR

Specifications and Ordering Information

Single Circuit, Dimmable Indoor/Outdoor Enclosure, UL Listed, File E471431, CSA Approved, Manual Reset Overload Protection

	INPUT			OUTPUT		
MODEL NUMBER	VAC	Hz	AMPS (Max.)	VDC	AMPS (Max.)	Watts
361-12DCR	120	50/60	0.58	12	3A	36
362-12DCR-240	240	50/60	0.28	12	3A	36
363-12DCR-277	277	50/60	0.24	12	3A	36
481-24DCR	120	50/60	0.63	24	2A	48
482-24DCR-240	240	50/60	0.33	24	2A	48
483-24DCR-277	277	50/60	0.28	24	2A	48
601-12DCR	120	50/60	0.81	12	5A	60
602-12DCR-240	240	50/60	0.41	12	5A	60
603-12DCR-277	277	50/60	0.38	12	5A	60
961-24DCR	120	50/60	1.12	24	4A	96
962-24DCR-240	240	50/60	0.57	24	4A	96
963-24DCR-277	277	50/60	0.50	24	4A	96

Multiple Circuit, Dimmable Indoor/Outdoor Enclosure, UL Recognized, File E235322, Manual Reset Overload Protection

	INPUT			OUTPUT		
MODEL NUMBER	VAC	Hz	AMPS (Max.)	VDC	AMPS (Max.)	Watts
C2240-12DCR	120	50/60	2.2	12	5A Per Circuit 4 x 60VA Class 2 Circuits	240
C2240-24DCR	120	50/60	2.5	24	4A Per Circuit 3 x 96VA Class 2 Circuits	288

Above units available in 240 or 277V inputs. Order "-240" or "-277". Manual Reset Overload Protection for each Class 2 Circuit.
Important – Do not interconnect output circuits.

Individual Circuit DC Power Supply Specifications

Description	24V Model Value	12V Model Value	Unit
Input Voltage	120 / 240 / 277	120 / 240 / 277	Volts AC, 1 AMP Max.
Output Voltage	24.0 +/-0.3	12.0 +/-0.3	Volts DC
Output Current	2A, 48W/4A, 96W	3A, 36W/5A, 60W	Amps
Current Limit	2.5/4.5 +/-0.25	3.5/5.5 +/-0.25	Amps
The following applies to all models			
	Details	Unit	
Load Regulation	2%	Volts	
Line Regulation	5%	Volts	
Input Frequency	50-60	Hertz	
Power Factor	.85 Typical		
Efficiency	80 Typical	%	
MTBF	100,000	1 Hours	
Operating Environment (AMB)	Minus 30 to +60	Deg "C"	
Function Surface Temp.	-40 to +80 (25 C AMB)	Deg "C"	
Storage Temp.	Minus 65 to +90	Deg "C"	
Humidity	100 (Non Cond)	%	
Size	11.25 x 3.37 x 3.25	Inches	
Shipping Weight	7.0	Pounds	
APPROVALS – SINGLE CIRCUIT: UL Listed Class 2 Power Supplies, UL 1310, UL 1012 (File E471431) MULTIPLE CIRCUIT: UL Recognized Sign Accessory, UL 48 (File E235322) CONSTRUCTION – Indoor/Outdoor NEMA Type 3R Rainproof Enclosure WALL MOUNTING – Conduit Access Class 1 Wiring Compartment 3 Year Limited Warranty Compatible with forward phase dimmers designed specifically for magnetic or inductive circuits. See PDF for detailed application information. Models and Specifications Subject to Change Without Notice			